


MICRO

The compact, fast small control system

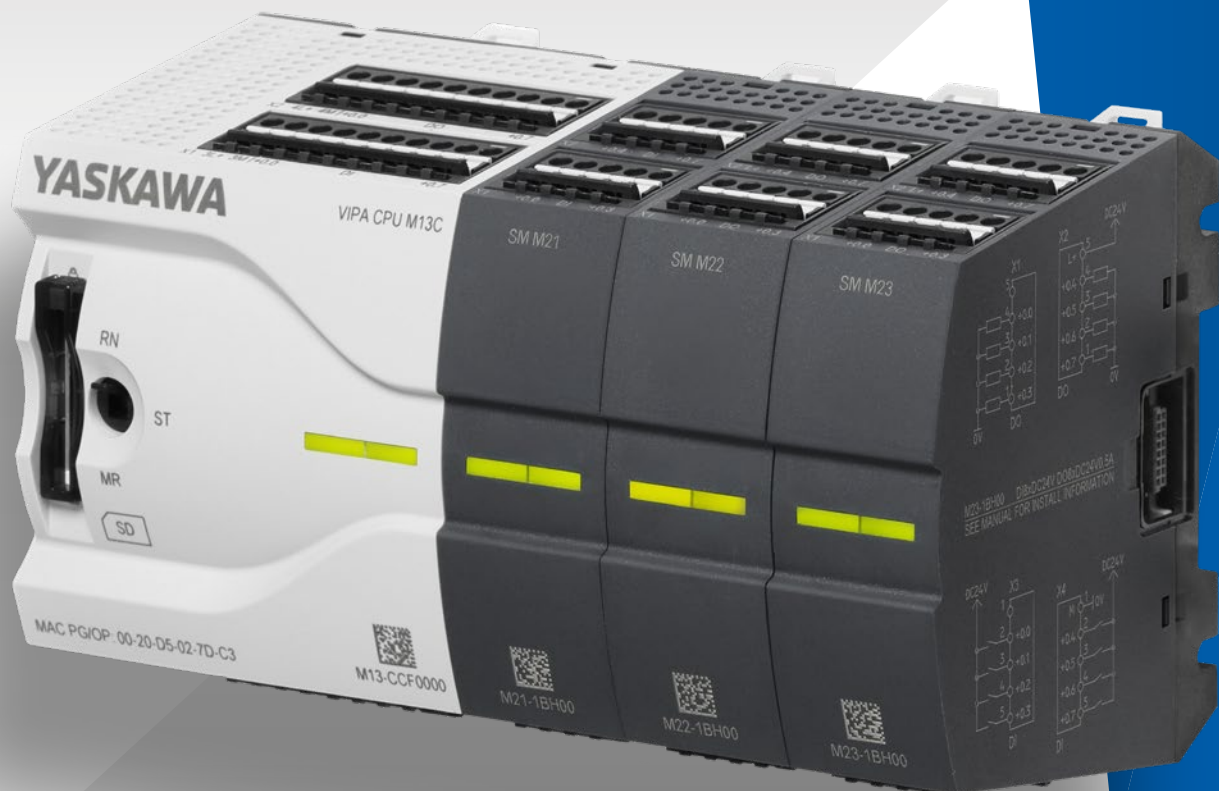

Modern, compact and fast

CPU FACTS

- PROFINET IO-Controller and I-Device
- Integrated web server for device diagnosis and web visualisation
- Ethernet PG/OP channel for active and passive communication
- 16 digital inputs, DC 24V with integrated status display
- 12 digital outputs, DC 24V 0.5A with integrated status display
- 2 configurable analogue inputs: voltage 0...10V or current 4...20mA
- 4 channels for counters, frequency measurement and 2 channels for pulse width modulation
- 128 Kbytes integrated working memory
- I/O address range, digital/analogue 2048 bytes
- 512 timer/meter, 8192 bit memory bytes
- Low dissipation power, max. 7W
- External memory ability with SD card (up to 2GB)
- Programmable via SPEED7 Studio, Siemens SIMATIC Manager or Siemens TIA Portal



10-100x faster than traditional controls

Removable plug with push-in technology for installation without tools

Up to 8 modules can be added

Permanent memory and SD card as external storage option

2-way switch for PROFINET and active Ethernet connection

Extremely compact design

Much faster backplane bus



MICRO EXPANSIONS

2xRS485 expansion module

- 2x serial interfaces (RS485/RS422, MPI, Modbus)
- PROFIBUS-DP-Slave can be activated with VIPA Set Card

Up to 8 periphery modules

- Digital input module
- Digital output module
- Digital in-/output module
- Analogue input module
- Analogue output module

Power supply

- AC 120 ... 240V / DC 24V, 1.5A



PROFINET IO-Controller



MICRO PROFINET I-Device

Visualisation / WebVisu



MICRO PROFINET IO-Controller

PROFINET Device ... up to 8

The MICRO system

A combination of high functionality and excellent performance in a very small size offers new opportunities to optimise processes and increase performance. Even in the smallest equipment and machines.



The MICRO PLC is the introduction of a new control concept. The MICRO PLC is not only small, compact and high-performance in communication; it also offers additional benefits to users.

Just two examples: a removable plug which simplifies pre-wiring and installation, as well as channel-specific LEDs which are attached directly to each contact. Clear and modern design together in the new MICRO PLC with the latest technology and user-friendly features.

Setting and programming the MICRO small controller system is done as with SLIO using SPEED7 Studio, Siemens SIMATIC Manager or Siemens TIA Portal. This ensures that existing S7 know-how can continue to be used for programming.

The MICRO as a PROFINET controller can be extended by up to eight PROFINET devices. The SLIO I/O system is available, for example, as a PROFINET device. The PROFINET I-Device function makes it possible for you to couple the MICRO to a PROFINET master. The MICRO PLC provides maximum performance in the smallest space in the control cabinet. Its minimal size allows brand new planning designs for various user applications.



The current versions of MICRO PLC are equipped with an integrated web server, which allows any access to data, diagnoses, and status screens as well as visualisation projects via smart phone, laptop, etc..



In addition to standard Ethernet protocols, such as Modbus TCP or S7 communication, MICRO also speaks PROFINET.



Available components



Power supply

M07-2BA00
Input AC
120 ... 240V
Output 24V DC,
1.5A



CPU M13C

M13-CCF0001
PROFINET Controller



RS485 Extension

M09-0CB00
2x Serial RS485/
S422,
MPI, Modbus
PROFIBUS-DP-Slave



Digital Input

M21-1BH00
16x DI
DC 24V

Digital Input/ Output

M23-1BH00
8x DI + 8x DO
DC 24V, 0.5A

Digital Output

M22-1BH00
16x DO
DC 24V, 0.5A

M22-1HF10
8x DO
AC 230V, 2A Relays

Analogue Input

M31-1CD50
4x AI, 16Bit
0 ... 10V + -10V

Analogue Output

M32-1BD70
4x AO, 12Bit
0 ... 10V + -10V

M32-1BD40
4x AO, 12Bit
0/4 ... 20mA

YASKAWA Europe GmbH

Drives Motion Controls
Ohmstraße 4
91074 Herzogenaurach
Germany

Tel.: +49 (0) 6196 569-500
E-Mail: support@yaskawa.eu
www.yaskawa.eu.com

05/2022